


SINCE 1925

KEYSTONE

SAFETY ⇄ CLEANROOM PRODUCTS

AUTOCLAVABLE TYVEK® MUFFS WITH SKIRT EXTENSION

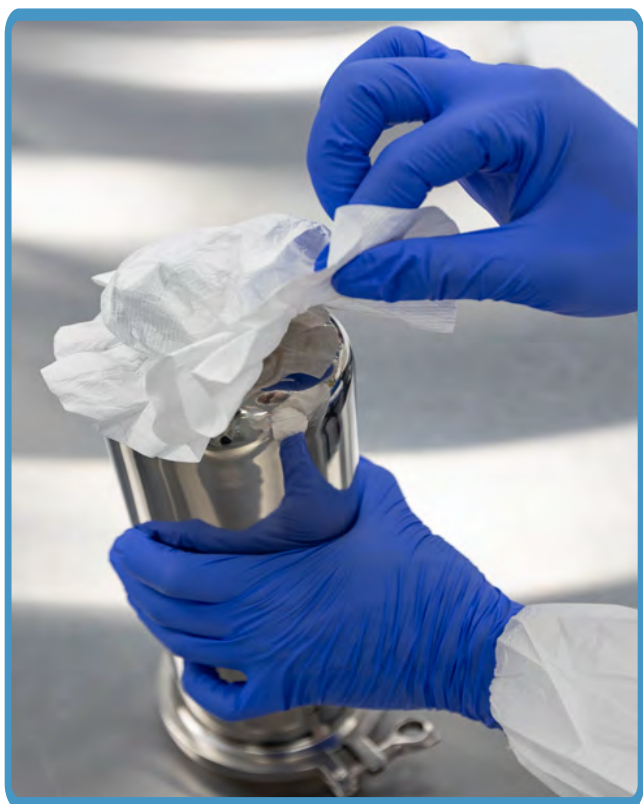

Designed to offer enhanced protection during aseptic removal after sterilization. Touching the Muffs at the skirt extension prevents the fingers from coming into direct contact with the elastic, or the connection itself, compared to the way a regular Muff is removed.

When used as an autoclavable cover, these Muffs with the skirt extension eliminate the need for the autoclave tape and rubber bands, which minimizes particulate generation and improves aseptic technique.

When used as a clean equipment cover, the Muffs with the skirt extensions are a convenient way to protect clean equipment from external contamination.

TYPICAL APPLICATION & CHARACTERISTICS:

- Tyvek® has the highest microbial barrier properties among all steam sterilization wrapping compatible materials
- Skirt extension prevents accidental touching of the elastic and the aseptic connection
- Lint-free – Category 1 (Helmke Drum)
- Manufactured and packaged in ISO certified cleanrooms
- Conveniently packaged: 100 per heat-sealed, labeled
- Eliminates autoclave tape residue
- Hydrophobic
- Resists tearing and punctures
- Certificates of Conformance sent with all shipments
- Made in USA

SINCE 1925

KEYSTONE

SAFETY ⇄ CLEANROOM PRODUCTS

AUTOCLAVABLE TYVEK® MUFFS WITH SKIRT EXTENSION



MATERIAL SPECIFICATIONS:

PROPERTY	UNIT	TEST METHOD	TYPICAL VALUES 1422A TYVEK®
Linting Propensity	Rating	BS 6909 (Shirley Method 21)	Pass Rating: Excellent
Basis Weight	g/m2	EN ISO 536	41
Total Thickness	μ	EN 20534	130
Air Permeability	s	ISO5636-5	20
Water Vapor Permeability	G/M2/ 24 HR	ASTM 398	1700
Hydrostatic Head	cm H2O	ISO 811	120
Trapezoidal Tear MD	N	ISO 9073-4	26.1
Trapezoidal Tear CD	N	ISO 9073-4	30.6
Burst Resistance	kPa	ISO 2960 (50 cm2)	108
Puncture Resistance	N	EN 863	10.8
Melting Point	C °		135

KEYSTONE PART NUMBER	DIMENSIONS
MFT2A05SK02	5" used for openings 1 3/4" to 2 1/2"
MFT2A07SK02	7" used for openings 2 1/2" to 4 "
MFT2A08SK02	8" used for openings 3 1/2" to 4 3/4"
MFT2A09SK02	9" used for openings 4" to 5 1/2"
MFT2A12SK02	12" used for openings 5 1/2" to 8"
MFT2A16SK02	16" used for openings 8" to 12"